


T-7555VAC & T-7556VAC Palm Grip DA Sanders Vacuum Ready



OILING INSTRUCTIONS:

**OIL AFTER EACH USE
WITH 1 OR 2 TABLE-
SPOONS OF AIRTOOL OIL
THROUGH THE AIR INLET.
RUN FOR ONE SECOND TO
COAT ALL INTERNAL
PARTS.**

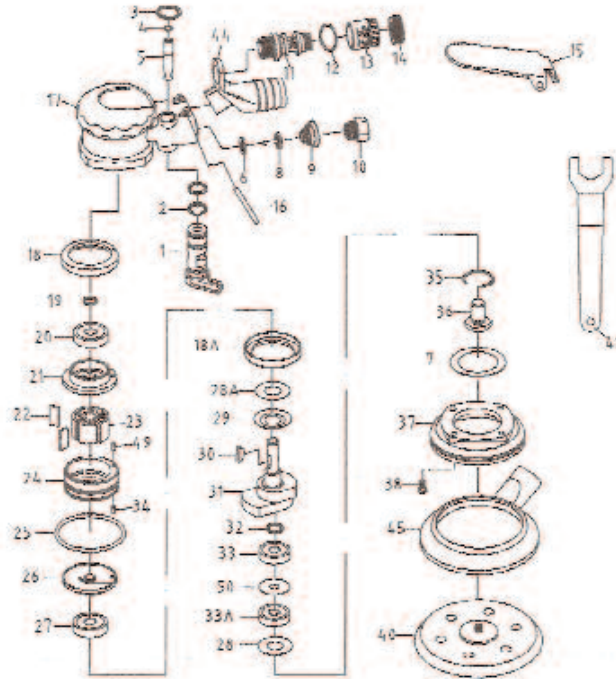

USE 90 PSI MAXIMUM

Ref.#	Part #	Description	Qty.	Ref.#	Part #	Description	Qty.
1	755501	Regulator	1	26	755526	Front End Plate	1
2	755502	"O" Ring	2	27	755527	Bearing	1
3	755503	Snap Ring	1	28	755528	Washer	1
4	755504	"O" Ring	1	29	755529	Washer	1
5	755505	Valve Stem	1	30	755530	Rotor Key	1
6	755506	Washer	1	31	755531	Motor Shaft Balancer3/16	1
7	755507	Pin	1	31	7555B31	Motor Shaft Balancer3/32	1
8	755508	Valve	1	31	755631	MSB 3/16 for 7556	1
9	755509	Spring	1	31	7556B31	MSB 3/32 for 7556B	1
10	755510	Air Inlet	1	32	755532	Snap Ring	1
11A	755511A	Muffler Assembly (11,12 x2, 13,14)	1	33	755533	Bearing	1
15	755515	Lever	1	34	755534	Shaft Seal	1
16	755516	Pin	1	35	755535	Snap Ring	1
17	755517	Housing	1	36	755536	Shaft	1
18	755518	Rubber Bushing	2	37	755537	Housing Cover	1
19	755519	Snap Ring	1	38	755538	Screw	4
20	755520	Bearing	1	39	755539	Shroud	1
21	755521	Rear End Plate	1	40	7415VAC	Vacuum Pad 5"	1
22	755522	Rotor Blade (5 per set)	1 set	40	7416VAC	Vacuum Pad 6"	1
23	755523	Rotor	1	41	755541	Wrench	1
24	755524	Cylinder	1	44	7555VAC44	Vacuum Adapter	1
25	755525	"O" Ring	1	45	7555VAC45	Shroud	1

505 N. Railroad Ave.
P.O. Box 1117
Boynton Beach, Florida 33435

SEE OUR CATALOG

at

www.taylorpneumatic.com

PH. 561-732-1111

FAX 561-731-4412

Toll Free 800-805-8665

05/12 TPTCDPT
all rights reserved
copyright 2012
final