


T-7665

Detail Triangular Mini Jitterbug Sander



OILING INSTRUCTIONS:

OIL AFTER EACH USE WITH 1 OR 2 TABLE-SPOONS OF AIRTOOL OIL THROUGH THE AIR INLET. RUN FOR ONE SECOND TO COAT ALL INTERNAL PARTS.

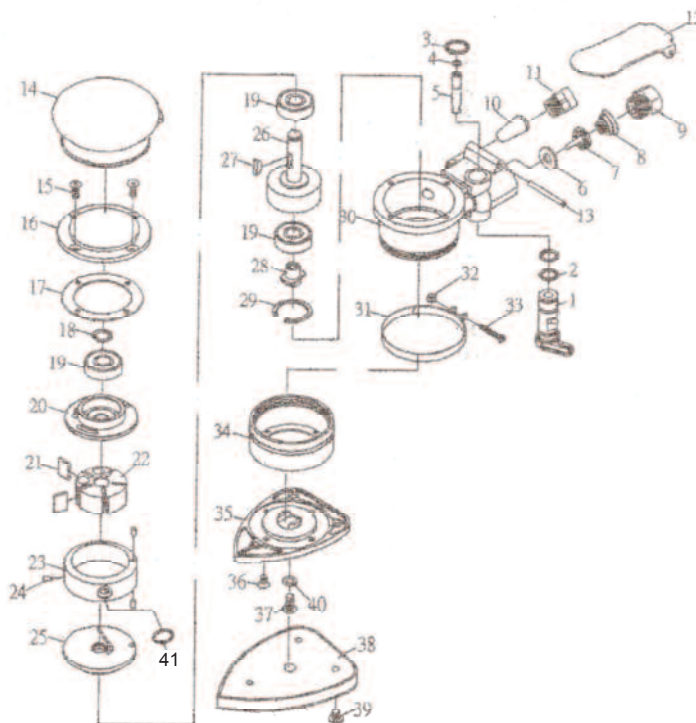

USE 90 PSI MAXIMUM

Ref.#	Part #	Description	Qty.	Ref.#	Part #	Description	Qty.
1	766501	Regulator	1	25	766525	Front End Plate	1
2	766502	"O" Ring	2	26	766526	Balancer	1
3	766503	Snap Ring	1	27	766527	Rotor Key	1
4	766504	"O" Ring	1	28	766528	Shaft	1
5	766505	Valve Stem	1	29	766529	Snap Ring	1
6	766506	Washer	1	30	766530	Housing	1
7	766507	Valve	1	31	766531	Skirt Band	1
8	766508	Spring	1	32	766532	Nut	1
9	766509	Air Inlet	1	33	766533	Screw	1
10	766510	Muffler	1	34	766534	Skirt	1
11	766511	Exhaust Sleeve	1	35	766535	Pad Seat	1
12	766512	Lever	1	36	766536	Screw	1
13	766513	Pin	1	37	766537	Screw	1
14	766514	Rubber Guard	1	38	766538	Pad PSA	1
15	766515	Screw	4	38A	766538A	Pad Velcro (optional)	
16	766516	Top Cover	1	39	766539	Screw	3
17	766517	Packing	1	40	766540	Washer	1
18	766518	Snap Ring	1	41	766541	"O" Ring	1
19	766519	Bearing	3				
20	766520	Rear End Plate	1				
21	766521	Rotor Blade (set of 5)	1 set				
22	766522	Rotor	1				
23	766523	Cylinder	1				
24	766524	Pin	3				

505 N. Railroad Ave.
P.O. Box 1117
Boynton Beach, Florida 33435

SEE OUR CATALOG
at
www.taylorpneumatic.com

PH. 561-732-1111
FAX 561-731-4412
Toll Free 800-805-8665

02/10 TPTCDPT
all rights reserved
copyright 2010
final